

V SERIES

LUXURY
YOU CAN
AFFORD



IT'S SO MUCH MOWER®

MIDMOUNT™ TRUE ZEROTURN™ MOWERS



BETTER BY DESIGN.

A manicured cut so smooth it makes your grass look and feel like carpet. Clean, even stripes that look as though they were painted on. A finish like this doesn't happen by accident. It takes a mower with the perfect combination of power, performance, comfort and capabilities. One that's designed to deliver the same perfect cut with minimal maintenance, season after season. One that turns mowing from a job into a joy.

A Grasshopper V Series MidMount™ mower.

Sure, you can walk into any big box store and buy a mower. But why settle for "good enough" when you can invest in an affordable, best-in-class V Series mower that's fun to operate, saves you money on upkeep and maintenance, and saves you time by delivering a superb cut quickly and easily every time you mow?



COMFORT: The key to precise control

Comfort isn't just about how a mower makes you feel. It's also about how it affects your performance as an operator. A smoother ride means greater, more precise control at faster mowing speeds, so you can stay refreshed, finish faster and leave a manicured finish.



MOW IN COMFORT

Melt into an iso-mounted, CoolTemp Cordura® Seat with lumbar support and padded armrests, complemented by an iso-mounted, shock-absorbing footrest.



RESPONSIVE STEERING

If you've pushed a shopping cart, you can steer a Grasshopper. Hydra-Smooth™ dampened dual swing-out levers deliver effortless control of speed and direction, and easily adjust to your reach.



ERGONOMIC CONTROLS

Eliminate twisting or turning with our ergonomically designed View-Eze™ operator station, which maximizes visibility and puts operational controls and adjustable cup holder at your fingertips.



SIZED FOR PRODUCTIVITY

Zip in and out of tight spaces with precise handling and superior traction, thanks to a low center of gravity and a compact wheelbase.





ENGINES & TRANSMISSIONS: The power at the heart of it all
 You'll never be short on power with a Grasshopper V Series MidMount™ mower, thanks to commercial-grade engines and transmissions that ensure consistent, powerful performance.

FULLY HYDRAULIC "NO GEARS" TRANSMISSION



Mow through tall or wet grass easily with no loss of power, thanks to design-matched, fully hydraulic transmissions. Since gears can wear down and deposit metal filings into the oil, our "no gears" design eliminates power-robbing gearboxes and transfers more power to the cutting deck for smoother, quieter operation, longer service life, enhanced traction through turns and a better quality cut.

>> Your choice of engines



COMMERCIAL TURF ENGINE

Features heavy-duty components for enhanced power and reliability, 5-step Integrated Cyclonic Air Management System for cleaner performance and extended service intervals.



ENGINE WARRANTY AND SUPPORT

Both engines offer a 3-year limited commercial engine manufacturer warranty and strong manufacturer support.



KOHLER CONFIDANT ENGINE

Maximizes airflow and reduces operating temperatures with heavy-duty cyclonic air filter, QuadClean™ multi-stage air filtration and full-pressure lubrication to protect components.





CUTTING DECKS: A carpet-like cut, every time

A great cut begins and ends with the cutting deck, which is why Grasshopper V Series mowers are equipped with extra-deep, 5.5-inch decks.* Specially designed cutting chambers enhance airflow for better clipping distribution and a picture-perfect cut.

HANDLE CLIPPINGS YOUR WAY

V Series cutting decks easily convert from standard side discharge to optional Down Discharge™ mulching or PowerVac™ collection in minutes without tools.



SIDE DISCHARGE



MULCH



COLLECT

A CHOICE OF BLADES

Match your blades to your conditions with our GrassMax™ Blade System. ADI MARBAIN® blades are 1/4 inch thick and hold their edge longer, delivering a better cut and twice the life of aftermarket replacements.



High-Low Mulching



Medium Lift



Contour



High-Lift Notched



Extreme High-Lift Notched



>> Look for the Grasshopper logo and part number on the grass side of the blade to ensure you are using OEM blades.



EASY HEIGHT ADJUSTMENT

Raise and lower the deck for precision cutting heights between 1 and 5 inches with QuikAjust™ DropPin™ Height Adjustment. May also be used to lock the deck into transport position with the quick-set pivot latch.

* 4.5-inch deck on 124V41.



DURABILITY: Great mowers are built to last

Any mower should perform when it's brand new. But what about next year? Or the year after? With a Grasshopper, you'll never have to worry, because our V Series mowers are built with robotically welded high-grade steel, a tubular exoSkeletal™ frame and formed steel I-beam reinforcement designed to withstand years of rugged use. Your mower will keep its "like new" appearance, thanks to a fusion-bonded, powder-coat finish that is both chip- and rust-resistant.

STRENGTH TO SPARE

Easily handle curb shocks and weight shifts with 650% greater load-bearing capacity than competitive mowers.* Handles the weight of operator, fuel and collector with strength in reserve.

DECK SHEET METAL THICKNESSES			
SHOWN ACTUAL SIZE			
0.1196 in. (3.0378 mm)	0.1345 in. (3.4163 mm)	0.1793 in. (4.5542 mm)	0.2391 in. (6.0731 mm)
11 ga.	10 ga.	7 ga.	3 ga.
			Grasshopper Deck Thickness 0.313 in. (7.9502 mm) 30% thicker than 3 ga.




HEAVY-DUTY CUTTING DECKS

Extra-deep, robotically welded decks are fabricated out of heavy-gauge formed steel and stronger than stamped steel decks. The 48-, 52- and 61-inch decks also feature a reinforced anvil edge.

THE INDUSTRY'S TOUGHEST SPINDLES

- 1 Massive 8-inch spindle flanges anchored in a 6-bolt pattern spread the force of impact for greater strength in tough mowing applications.
- 2 Double-layered, 10-gauge plus 7-gauge formed laminate spindle plane that is 0.313 inch thick** – that's 25% thicker than 0.25-inch (1/4-inch) steel – and nearly 1 inch thick in stress zones.
- 3 Sentry™ spindle guards shield the spindle housing and seal lower bearings from fiber wrap and dirt ingestion.
- 4 Non-greasable double bearings are designed for high rotational speeds and minimal maintenance.

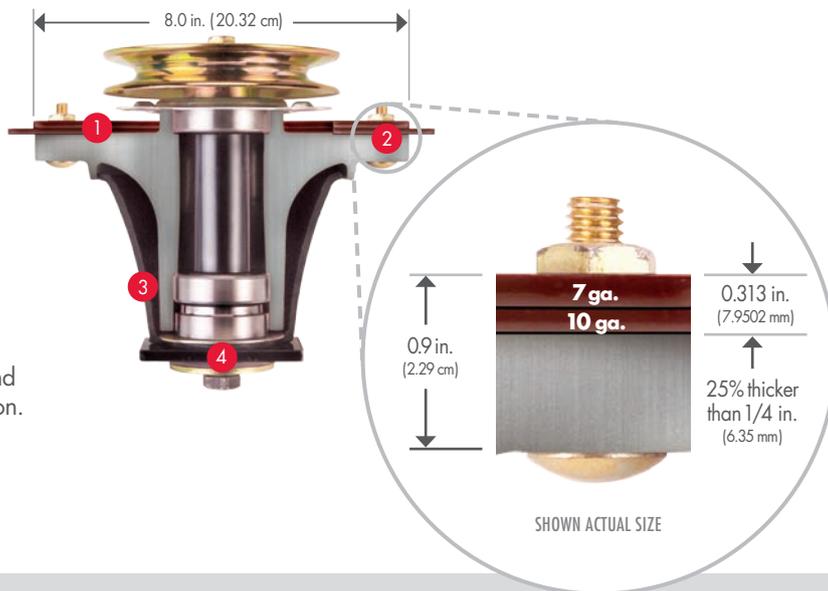

MAINTENANCE: A service-friendly design

It's easy to keep your mower in peak operating condition. Low-maintenance components mean reduced costs and less work after work.

>> BEST-IN-CLASS OIL CHANGES

Enjoy minimal maintenance with our best-in-class CoolTemp HydroMax™ transmission fluid change intervals (300 hrs. for 100V Series, 500 hrs for 200V Series) – with no break-in period.

>> ONLY TWO LUBRICATION POINTS

Never make excuses for neglecting maintenance again. Fewer lubrication points means you can make quick, easy work of regular maintenance.

* 200V Models: 2,600 lbs. per axle at 3 million revolutions versus competitors' 400 to 800 lbs. per axle. ** 10 ga. + 10 ga. on 100V models.



POWERVAC™ COLLECTION SYSTEMS: Perfect finish, every time

Get a clean, manicured finish every time you mow – even in high-moisture conditions – with a deck-driven PowerVac™ Collection System. Simply adjust your mowing speed to match conditions, and PowerVac™ will pick up virtually any type of debris. A trash-ingesting steel impeller reduces and compacts debris, so you can mow longer without emptying the collector.



TWIN OR TRIPLE BAGS

Choose from twin or triple 4-cu.-ft. reinforced, UV-resistant, rip- and tear-resistant bags that remove easily to empty debris.



HT MODELS

Models 8HT and 12HT feature hinged metal tops and metal props for easy emptying.



VERTICAL VAC SYSTEM

Pass through narrow openings with our Vertical Vac System, which mounts easily on any 41-inch deck to minimize overall width.



AIRSTREAM™ VAC

Designed for budget-conscious consumers, our non-impeller AirStream™ Vac for 41-inch decks provides narrow access and clean-sweep performance on manicured properties.

MODEL – CUTTING WIDTH	8F	8HT	12F	12HT
Capacity				
8 cu. ft. (227 liters)	•	•		
12 cu. ft. (340 liters)			•	•
Compatibility				
100V Series	•	•		
200V Series	•	•	•	•
Collector Type				
Rear-mounted; two slide-out mesh bags	•	•		
Rear-mounted; three slide-out mesh bags			•	•
Collector Top				
Hinged; fabric	•		•	
Hinged; metal		•		•
Mount Kit				
Included with collector	•	•	•	•
Quik-D-Tatch® Vac Drive				
Powered by a belt from the blade spindle. Mounts directly to the deck. Locked securely in place with thumbscrew. Included Medium Lift blades.	•	•	•	•
Hose				
Semi-transparent flex hose for visibility and clog resistance.	•	•	•	•
Width w/Vac Unit Attached				
41 in. deck		52.5 in. (133.4 cm)		
48 in. deck		60.5 in. (153.7 cm)		
52 in. deck		64.5 in. (163.8 cm)		
61 in. deck		73.5 in. (186.7 cm)		
Mounted Length of Power Unit, Deck and Collector				
Model 124V-41	99.0 in. (251.5 cm)			n/a
Models 124V-48, 125V-48, 125V-52, 126V-52	98.0 in. (248.9 cm)			n/a
Models 226V-48, 225V-52, 225V-61, 226V-61		99.5 in. (252.7 cm)		
Models 226V-48, 225V-52, 225V-61, 226V-61		73.5 in. (186.7 cm)		
Weight*				
Models 124V-41, 124V-48, 125V-48, 125V-52, 126V-52	200 lbs. (90.7 kg)	225 lbs. (102.0 kg)	n/a	n/a
Models 226V-48, 225V-52, 226V-52, 225V-61, 226V-61	265 lbs. (120.2 kg)	290 lbs. (131.5 kg)	350 lbs. (158.8 kg)	385 lbs. (174.6 kg)

* Includes counterweight. Subtract 10 lbs. for 225V-52 and 226V-52.

** Subtract 55 lbs. for AirStream™ vac option (124V-41 only).

V SERIES TRUE ZEROTURN™ MIDMOUNT™ MOWERS

100V SERIES



Glide smoothly through gates and into tight spaces with the Model 124V-41, which is perfectly suited for narrow access applications.



Maintain precise control of the mower's agility with a design-matched, hydrostatic, integrated pump-and-wheel-motor transmission that ensures smooth movement, prevents wheel slip and transfers more power to the cutting deck. CoolFan™ hydro cooling system manages heat at the source, protects critical components and promotes longer life.

100V SERIES OPTIONS: Available in these cutting deck widths **41"** **48"** **52"**

- Quik-D-Tatch® PowerVac™ Collection Systems
- Down Discharge™ mulching packages
- Halogen work lights
- Yellow beacon light
- Vinyl Sunshade Canopy

- Custom Cordura® weather cover
- Foot pedal extension
- GrassMax™ blade options
- Heavy-duty striping kit



100V: Make quick work of mowing with speeds up to 8.0 mph and 3.79 acres per hour with a 52-inch cutting deck.*

V SERIES mower features

- 1** Count on reliable power to meet your mowing needs with a choice of professional-grade V-Twin engines.
- 2** Relax in a deep-cushioned, scuff-resistant, CoolTemp Cordura®-covered high-back seat with padded lumbar support and steel-support armrests.
- 3** Eliminate vibration for all-day comfort with a shock-absorbing footrest.
- 4** Stay refreshed and hydrated, thanks to an adjustable cup holder that accommodates virtually any size container.

200V SERIES



Enjoy smooth control of every movement with a commercial-grade, separate pump-and-wheel-motor drive system that provides precise control of agility, prevents wheel slip and transfers maximum power to the cutting deck.

CoolFan™ hydro cooling system manages heat at the source, protects critical components and promotes longer life.

For better traction and stability, we've placed the 12-gallon fuel tank under the seat to enhance the low center of gravity.



>> DuraFlex™ option available on all 200V

200V SERIES OPTIONS: Available in these cutting deck widths **48"** **52"** **61"**

- Quik-D-Tatch® PowerVac™ Collection Systems
- Down Discharge™ mulching packages
- TrimAide™ roller kit
- Halogen work lights – plug-in ready
- Wide seat conversion kit
- Extended levers for taller operators
- Yellow beacon light
- Sunshade Canopy – vinyl or aluminum

- Foldable ROPS with adjustable seat belt
- DuraFlex™ suspension forks
- Edge-EZE™ edger
- Tine-Rake™ Dethatcher
- Custom Cordura® weather cover
- GrassMax™ blade options
- Heavy-duty striping kit



200V: Increase your productivity with speeds up to 9.0 mph and 5.00 acres per hour with a 61-inch cutting deck.*

- 5** Remain comfortably in control of speed and direction with Hydra-Smooth™ dual swing-out levers.
- 6** Enjoy a carpet-like cut with a heavy-duty cutting deck that offers superior airflow and lets you mulch, collect or side discharge with the same deck.





Air-Cooled 100V Series MidMount™ Specifications

MODEL – CUTTING WIDTH	124V-41	124V-48	126V-52	125V-48	125V-52
ENGINE					
Type/Cylinders					
Commercial Turf/V-Twin	•	•	•		
Kohler Confidant				•	•
Displacement					
44.2 cu. in. (724 cc)	•	•			
49.4 cu. in. (810 cc)			•		
45.6 cu. in. (747 cc)				•	•
Lubrication System					
Pressure Lube, Filter	•	•	•	•	•
Crankshaft					
Vertical	•	•	•	•	•
Cooling System					
Air	•	•	•	•	•
Fuel / Capacity					
Gasoline - unleaded / 3 U.S. Gal (11.36 L)	•	•	•	•	•
Air Cleaner					
Integrated, cyclonic air cleaner with 5-step debris management system	•	•	•		
Heavy-duty cyclonic air filter with QuadClean™ multi-stage air filtration				•	•
Muffler					
Ultra-quiet, single, industrial type	•	•	•	•	•
MOWING DECKS					
Construction (Robotic-welded steel)					
Double-layered 10-gauge plus 10-gauge formed-steel spindle plane 0.269 in. (6.83 mm) thick with 7-gauge skirts.	•	•	•	•	•
Anvil-edge design with 0.5 in. (12.7 mm) reinforcement on front edge of deck		•	•	•	•
Blades (ADI MARBAIN®, 1/4-in.)					
(2) 21 in. (53.5 cm)	•				
(2) 18 in. (45.7 cm), (1) 15 in. (38.1 cm)		•		•	
(3) 18 in. (45.7 cm)			•		•
Spindle Assemblies					
Sentry™ Spindle System, 2.5 cm (approx. 1 in.) O.D. shaft. Spindle head designed to eliminate fiber wrap. Double bearings, non-greasable.	•	•	•	•	•
Spindle Housing					
8-in. (20.3 cm)-diameter machined aluminum housing with 6-bolt pattern.	•	•	•	•	•
Spindle Cones					
Spindle cones shield housing and lower bearings from fiber wrap and dirt ingestion.		•	•	•	•
Height Adjustment					
Foot-controlled height adjustment pedal with pin	•	•	•	•	•
Cutting Height Range					
1.0 – 5.0 in. (2.5 – 12.7 cm)	•	•	•	•	•
Blade Drive					
Belt drive with single Kevlar V-belt & idler arm tensioning	•	•	•	•	•
STARTER & ELECTRICAL SYSTEM					
Maintenance-Free Battery/Starter					
12 Volt/solenoid shift	•	•	•	•	•
Ignition					
Breakerless	•	•	•	•	•
Interlock System					
Prevents engine start when PTO clutch is engaged or steering levers are in drive position. Allows operator dismount without engine shutdown only when PTO is disengaged and steering levers are locked in neutral.	•	•	•	•	•
ULTIMATE OPERATOR STATION™					
USR™ Seat					
Ultimate Suspension Ride™ (USR™) deep-cushioned, high-back, foam-padded, scuff-resistant Cordura®-covered with padded lumbar support and armrests.	•	•	•	•	•
Suspension					
Roomy, iso-mounted footrest with Shock Impact Reduction System™ (SIRS™).	•	•	•	•	•
Console-Mounted Instruments					
Digital hour meter, parking brake indicator light, ignition switch, choke and push/pull PTO switch.	•	•	•	•	•

MODEL – CUTTING WIDTH	124V-41	124V-48	126V-52	125V-48	125V-52
Halogen Work Lights					
(Optional)	○	○	○	○	○
Digital Hour Meter					
(Standard)	•	•	•	•	•
TRANSMISSION & STEERING					
Type					
Design-matched hydrostatic system with in-line cooling fans. Fully hydraulic, integrated Parker HT Series transmission with variable displacement piston-type pumps and high-torque wheel motors for each wheel.	•	•	•	•	•
Filtration/Hydro Fluid					
Internal field-serviceable filter / No break-in oil change required; best-in-class service intervals with CoolTemp Hydro-Max™ fluid.	•	•	•	•	•
Speed					
0 – 7.5 mph (0 – 12.1 kph) forward	•				
0 – 5.5 mph (0 – 8.9 kph) reverse					
0 – 8.0 mph (0 – 12.9 kph) forward		•	•	•	•
0 – 6.0 mph (0 – 9.7 kph) reverse					
Turning Radius					
True zero degree, turns within own length with counter-rotating, independently powered drive wheels.	•	•	•	•	•
Steering					
One- or two-hand operation with adjustable Hydra-Smooth™ dual levers that automatically return to neutral from either forward or reverse position.	•	•	•	•	•
Brakes					
Dynamic braking through hydrostatic transmission	•	•	•	•	•
Parking Brake					
Compression	•	•	•	•	•
TIRE SIZES					
Drive Wheels – Standard					
20x10x8 turf	•				
20x10x10 turf		•	•	•	•
Front Casters					
13x5x6	•				
13x6.5x6 Pneumatic with greasable, double-sealed bearings to protect from grass wrap.		•		•	•
DIMENSIONS (Mower & Deck)					
Mulch Width*/Length					
42.5 in.* (108.0 cm)/76.0 in. (193.0 cm)	•				
49.5 in.* (125.7 cm)/75.0 in. (190.5 cm)		•		•	
53.5 in.* (135.9 cm)/75.0 in. (190.5 cm)			•		•
Left Side Trim					
1.0 in. (2.5 cm)	•				
3.0 in. (7.6 cm)		•		•	
6.0 in. (15.2 cm)			•		•
Height (Seat back)					
44.5 in. (113.0 cm)	•				
45.0 in. (114.3 cm)		•	•	•	•
Height (Seat cushion)					
27.5 in. (69.8 cm)	•				
28.0 in. (71.1 cm)		•	•	•	•
Height (ROPS)					
57.5 in. (146.1 cm)	•				
59.0 in. (149.9 cm)		•	•	•	•
WEIGHT					
Uncrated (Mower & Deck)					
660 lbs. (299.4 kg)	•				
815 lbs. (369.7 kg)		•			
835 lbs. (378.8 kg)			•		
840 lbs. (381.0 kg)				•	
860 lbs. (390.1 kg)					•
Mulching Package					
17 lbs. (7.7 kg)	•				
25 lbs. (11.3 kg)		•		•	
29 lbs. (13.2 kg)			•		•

○ Indicates optional accessory

* Add 1.5 in. (3.8 cm) to width for side discharge with deflector raised.

Air-Cooled 200V Series MidMount™ Specifications

MODEL – CUTTING WIDTH	225V-52	225V-61	226V-48	226V-52	226V-61
ENGINE					
Type/Cylinders					
Kohler Confidant	•	•			
Commercial Turf/V-Twin			•	•	•
Displacement					
45.6 cu. in. (747 cc)	•	•			
49.4 cu. in. (810 cc)			•	•	•
Lubrication System					
Pressure Lube, Filter	•	•	•	•	•
Crankshaft					
Vertical	•	•	•	•	•
Cooling System					
Air	•	•	•	•	•
Fuel / Capacity					
Gasoline - unleaded / 12 U.S. Gal (45.4 L)	•	•	•	•	•
Air Cleaner					
Heavy-duty cyclonic air filter with QuadClean™ multi-stage air filtration	•	•			
Integrated, cyclonic air cleaner with 5-step debris management system			•	•	•
Muffler					
Ultra-quiet, single, industrial type	•	•	•	•	•
MOWING DECKS					
Construction (Robotic-welded steel)					
Double-layered 10-gauge plus 7-gauge formed steel laminate spindle plane 0.313 in. (7.95 mm) thick – more than 25% thicker than 0.25 in. (6.35 mm) – with 7-gauge skirts for geometric strength.	•	•	•	•	•
Spindle plane is 0.9 in. (22.86 mm) thick in stress zones. Anvil-edge design with 0.5 in. (12.7 mm) reinforcement on front edge of deck.	•	•	•	•	•
Blades (ADI MARBAIN®, 1/4-in.)					
(2) 18 in. (45.7 cm), (1) 15 in. (38.1 cm)			•		
(2) 18 in. (45.7 cm)	•			•	
(3) 21 in. (53.3 cm)		•			•
Spindle Assemblies					
Sentry™ Spindle System, 2.5 cm (approx. 1 in.) O.D. shaft. Spindle head designed to eliminate fiber wrap. Double bearings, non-greasable.	•	•	•	•	•
Spindle Housing					
8-in. (20.3 cm)-diameter machined aluminum housing with 6-bolt pattern.	•	•	•	•	•
Spindle Cones					
Spindle cones shield housing and lower bearings from fiber wrap and dirt ingestion.	•	•	•	•	•
Height Adjustment					
Foot-controlled height adjustment pedal with pin	•	•	•	•	•
Cutting Height Range					
1.0 – 5.0 in. (2.5 – 12.7 cm)	•	•	•	•	•
Blade Drive					
Belt drive with single Kevlar V-belt & idler arm tensioning	•	•	•	•	•
STARTER & ELECTRICAL SYSTEM					
Maintenance-Free Battery/Starter					
12 Volt/solenoid shift	•	•	•	•	•
Ignition					
Breakerless	•	•	•	•	•
Interlock System					
Prevents engine start when PTO clutch is engaged or steering levers are in drive position. Allows operator dismount without engine shutdown only when PTO is disengaged and steering levers are locked in neutral.	•	•	•	•	•
ULTIMATE OPERATOR STATION™					
USR™ Seat					
Ultimate Suspension Ride™ (USR™) deep-cushioned, high-back, foam-padded, scuff-resistant Cordura®-covered with padded lumbar support and armrests.	•	•	•	•	•
Suspension					
Roomy, iso-mounted footrest with Shock Impact Reduction System™ (SIRS™).	•	•	•	•	•

MODEL – CUTTING WIDTH	225V-52	225V-61	226V-48	226V-52	226V-61
Console-Mounted Instruments					
Digital hour meter, parking brake indicator light, ignition switch, choke and push/pull PTO switch.	•	•	•	•	•
Halogen Work Lights					
(Optional)	○	○	○	○	○
Digital Hour Meter					
(Standard)	•	•	•	•	•
TRANSMISSION & STEERING					
Type					
Design-matched hydrostatic transmission system with in-line cooling fans, hydro fluid reservoir, Parker variable displacement piston-type pumps and high-torque wheel motors for each wheel.	•	•	•	•	•
Filtration/Hydro Fluid					
7 micron absolute / CoolTemp Hydro-Max™ fluid withstands high and low temperature extremes for extended service intervals. No break-in oil change required; best-in-class service intervals with CoolTemp Hydro-Max™ fluid.	•	•	•	•	•
Speed					
0 – 9.0 mph (0 – 14.5 kph) forward	•	•	•	•	•
0 – 6.0 mph (0 – 9.7 kph) reverse					
Turning Radius					
True zero degree, turns within own length with counter-rotating, independently powered drive wheels.	•	•	•	•	•
Steering					
One- or two-hand operation with adjustable Hydra-Smooth™ dual levers that automatically return to neutral from either forward or reverse position.	•	•	•	•	•
Brakes					
Dynamic braking through hydrostatic transmission	•	•	•	•	•
Parking Brake					
Disk parking brakes, one for each drive wheel.	•	•	•	•	•
TIRE SIZES					
Drive Wheels – Standard					
23x10.50x12 turf type, 4-ply rated (23x9.50x12 on 226V-48)	•	•	•	•	•
Front Casters					
13x6.5x6 rib tread, pneumatic with double-sealed bearings	•	•	•	•	•
DIMENSIONS (Mower & Deck)					
Mulch Width*/Length					
49.5 in.* (125.7 cm)/76.5 in. (194.3 cm)			•		
53.5 in.* (135.8 cm)/77.5 in. (196.8 cm)	•			•	
62.5 in.* (158.8 cm)/79.0 in. (200.7 cm)		•			•
Height (Seat back)					
45.0 in. (114.3 cm)	•	•	•	•	•
Height (Seat cushion)					
30.5 in. (77.5 cm)	•	•	•	•	•
Height (ROPS)					
69.0 in. (175.3 cm)	•	•	•	•	•
WEIGHT					
Uncrated (Mower & Deck)					
950 lbs. (430.9 kg)			•		
980 lbs. (444.5 kg)				•	
990 lbs. (449.1 kg)	•				
1050 lbs. (476.3 kg)					•
1060 lbs. (480.8 kg)		•			
Mulching Package					
25 lbs. (11.5 kg)			•		
29 lbs. (13.2 kg)	•			•	
36 lbs. (16.3 kg)		•			•

○ Indicates optional accessory

* Add 1.5 in. (3.8 cm) to width for side discharge with deflector raised.

** Package includes high-low mulching blades.

All specifications and information contained herein are subject to change without notice. Access-Eze, AirStream, CoolFan, CoolTemp Hydro-Max, Down Discharge, DropPin, DuraFlex, Edge-EZE, exoSkeletal, GrassMax, Hydra-Smooth, MidMount, QuikAdjust, PowerVac, Sentry, Shock Impact Reduction System, SIRS, TrimAide, True ZeroTurn, Ultimate Operator Station, Ultimate Suspension Ride, USR and View-Eze are trademarks and Grasshopper, the Grasshopper logo, DuraMax, First to Finish ... Built to Last, It's So Much Mower and Quik-D-Tatch are registered trademarks of The Grasshopper Company. All other products are trademarks or registered trademarks of their respective holders.



A MOWER YOU'LL LOVE TO USE.

Hands down, the most important component of any mower is the human in the operator's seat. That's why Grasshopper has continued to innovate in a way that complements the operator's mowing experience. That means delivering the reliable service and quality cut you want, but also minimizing the stress and labor that can make mowing such a chore. Ultimately, Grasshopper V Series True ZeroTurn™ MidMount™ mowers are the result of that effort. They're productive, efficient, powerful, comfortable and downright fun to operate, turning mowing from a job you dread into a joy you can't wait to experience again and again.

EXPERIENCE THE DIFFERENCE FOR YOURSELF.

VISIT YOUR GRASSHOPPER DEALER TODAY AND ASK FOR A DEMONSTRATION.



IT'S SO MUCH MOWER®



Proud Partner

The Grasshopper Company • 105 Old U.S. Highway 81
P.O. Box 637 • Moundridge, KS • 67107 U.S.A.
T: **620-345-8621** • F: **620-345-2301**



grasshoppermower.com

Litho in U.S.A. Form 0215-170538 © 2015 The Grasshopper Company